


Appendix C—Performance Curves for Model 060 Coro-Flo® Pumps¹

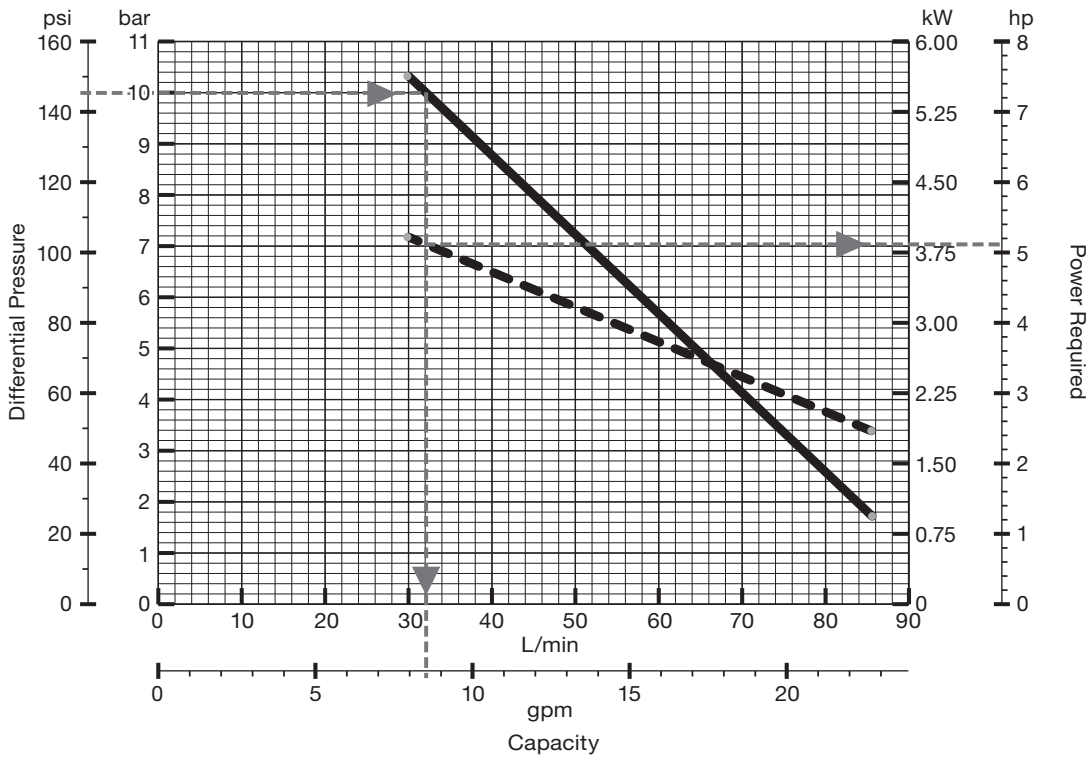

3450 RPM @ 60 Hz

Differential pressure:
 10.0 bar
 145.0 psi



Flow:
 32.2 L/min
 8.5 gpm

Power required:
 3.8 kW
 5.15 hp

Curves based on LPG¹
 Capacity ———
 Power required - - -



¹The performance curves are based on aboveground LPG installations. Performance curves for underground LPG tanks will vary based on the specific installation. Consult factory.

Appendix C—Performance Curves for Model 075 Coro-Flo® Pumps¹

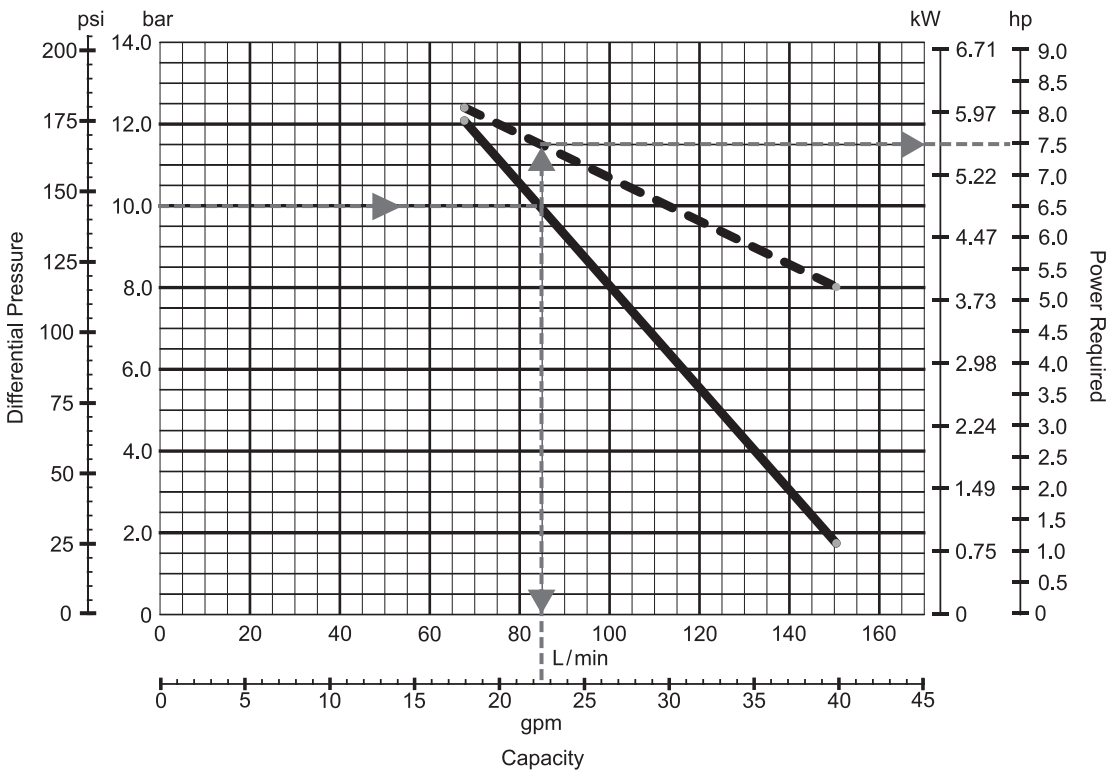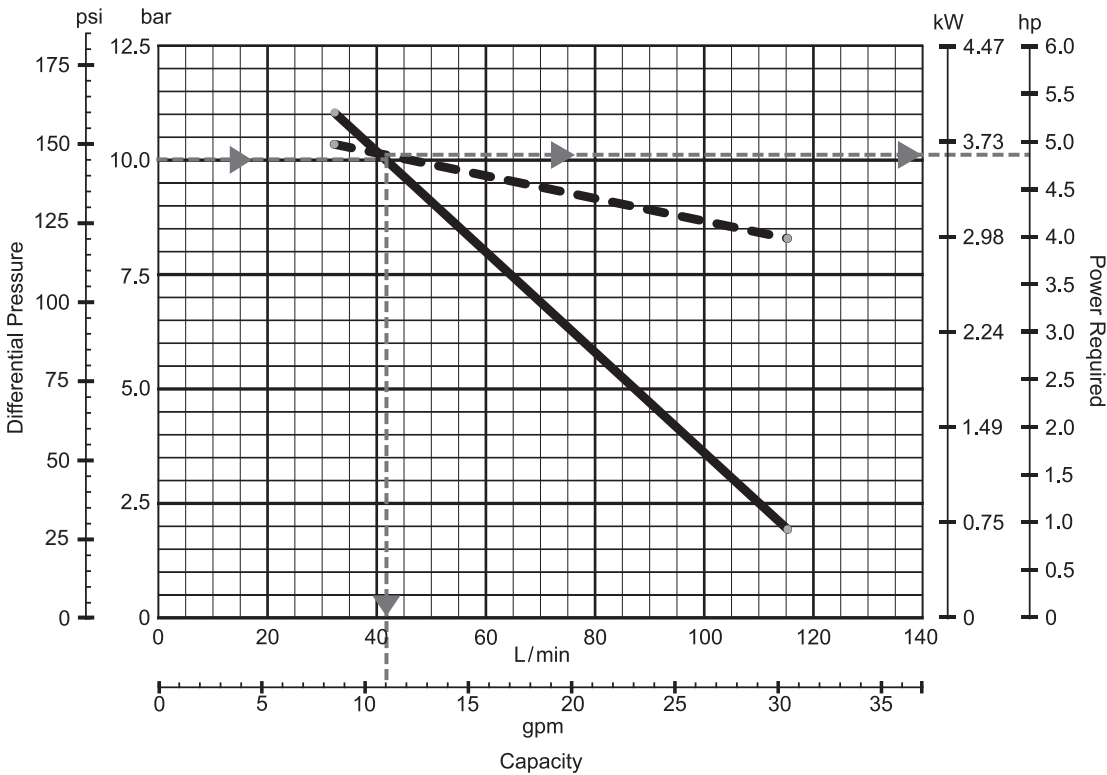

¹The performance curves are based on aboveground LPG installations. Performance curves for underground LPG tanks will vary based on the specific installation. Consult factory.

Appendix C—Performance Curves for Model 150 Coro-Flo® Pumps¹

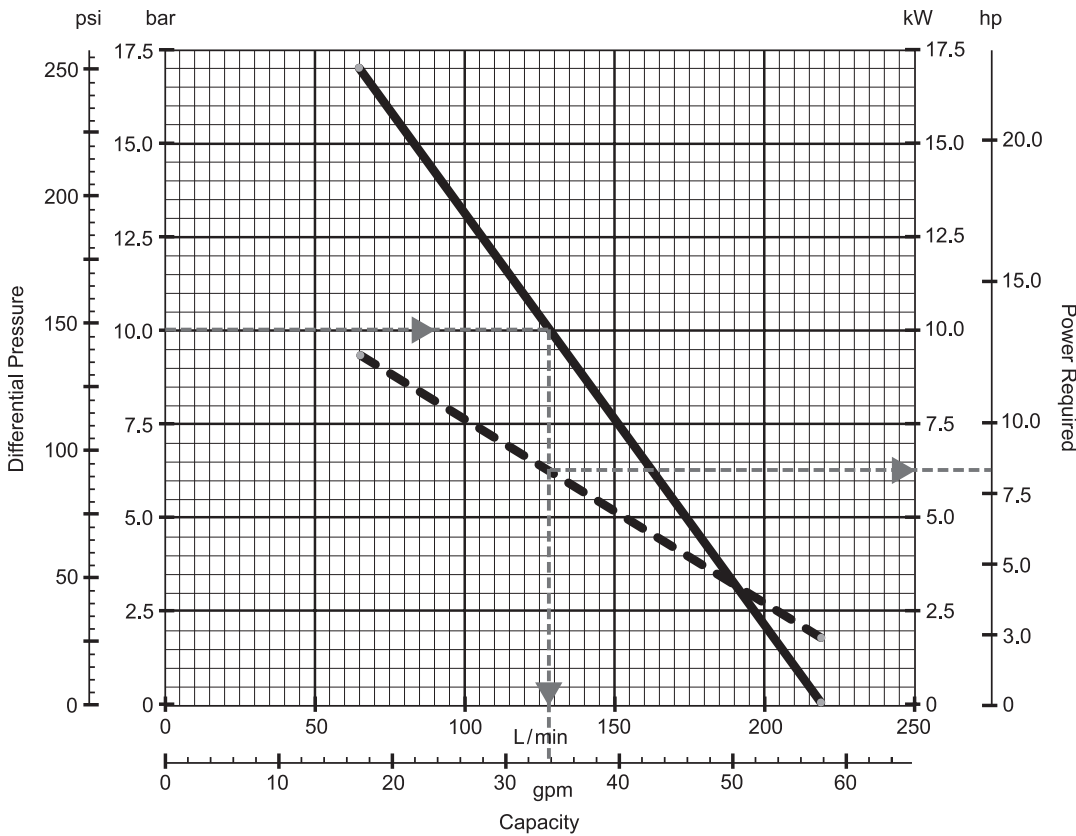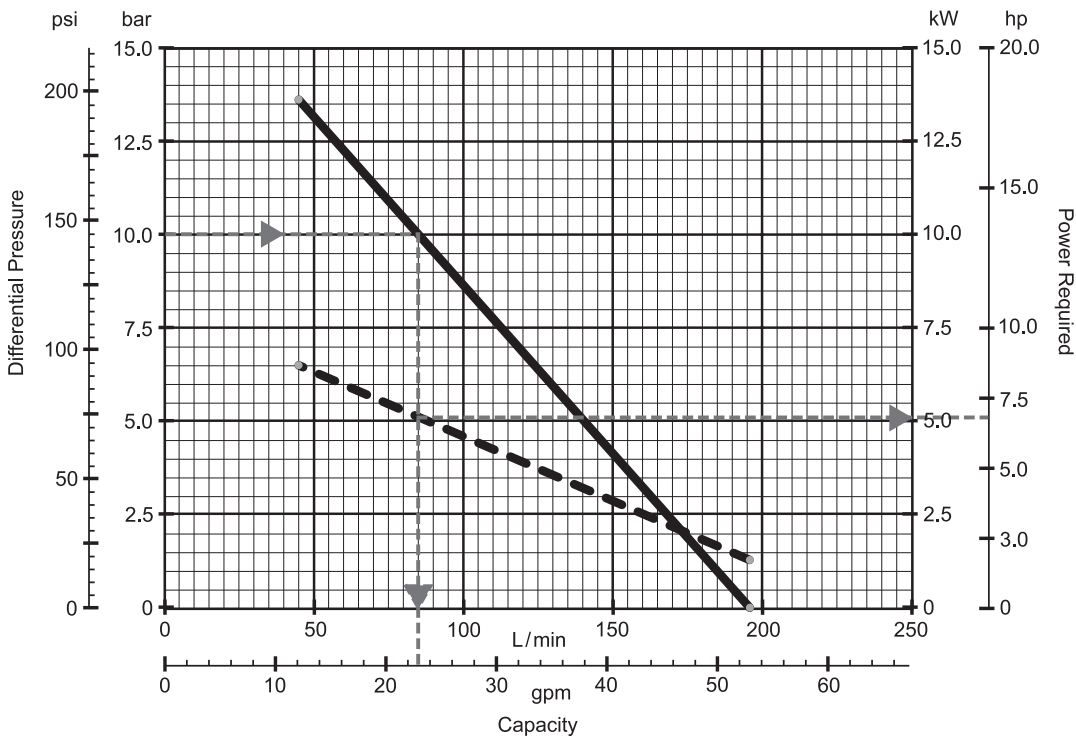

¹The performance curves are based on aboveground LPG installations. Performance curves for underground LPG tanks will vary based on the specific installation. Consult factory.